

## MP34-2

MOTOR PUMPS - FOR TRASH WATER




Self priming Petrol powered pumps to move large quantities of water, whether during flooding or simply filling a pond.

### Main features

Type		Trash
Max suction head	m	8
Max Delivery Head	m	30
Delivery Volume	l/min	700

### Performance curve

Graph

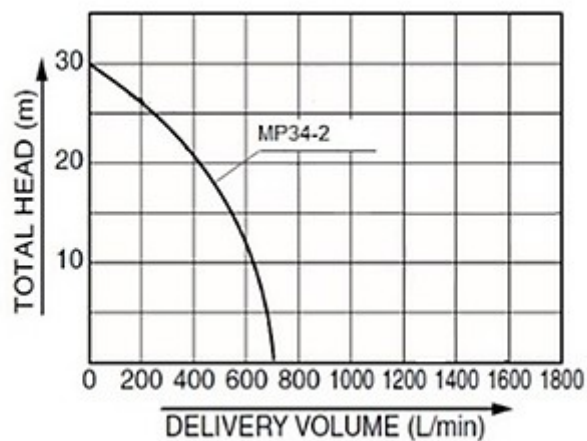

### Engine specifications

Nr. of cylinder and disposition		1 inclination angle
Displacement	cm <sup>3</sup>	163
Fuel		Gasoline
Starting system		Recoil



### Pump specifications

Manufacturer		KOSHIN
Inlet pipe diameter	'	2
Outline pipe diameter	'	2
Max Solid Size	mm	20
Material for mechanical seal		SiC
Material for impeller		Hi-Crome
Material for volute		Cast Iron



### Dimensional data

Length	(L) mm	620
Width	(W) mm	462
Height	(H) mm	481
Dry weight	Kg	47

### Consumption, running time and noise

Fuel tank capacity	l	3.1
Running time	h	2.2
Noise level at 7 m	dBA	78
Guaranteed noise level (LWA)	dBA	106

### General equipment

Strainer		1
Coupling Set		2
Hose band		3
Special Tool for pump		Standard
Spark plug tool		Standard
Oil guard		Standard



### Accessories

Printed on 9/02/2015 (ID 696)

©2012 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice | ENERGY GENERATION is registered trademarks of PR INDUSTRIAL s.r.l. Other company, product or service names may be trademarks or service marks of others. RevA (06/2012).

